



BALLO L804-500 LED RETROFIT KIT

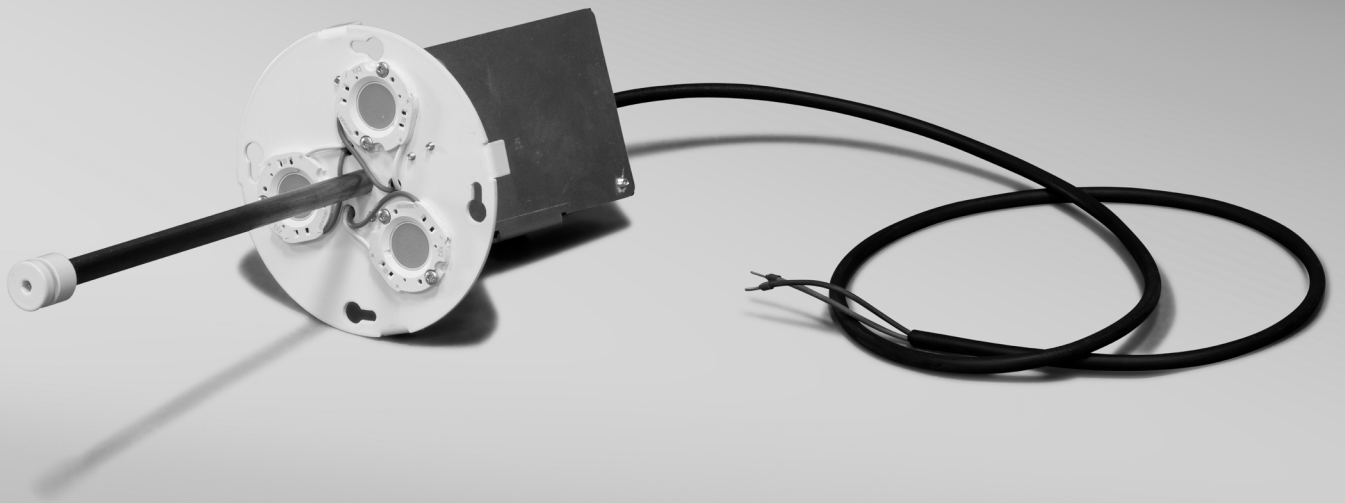

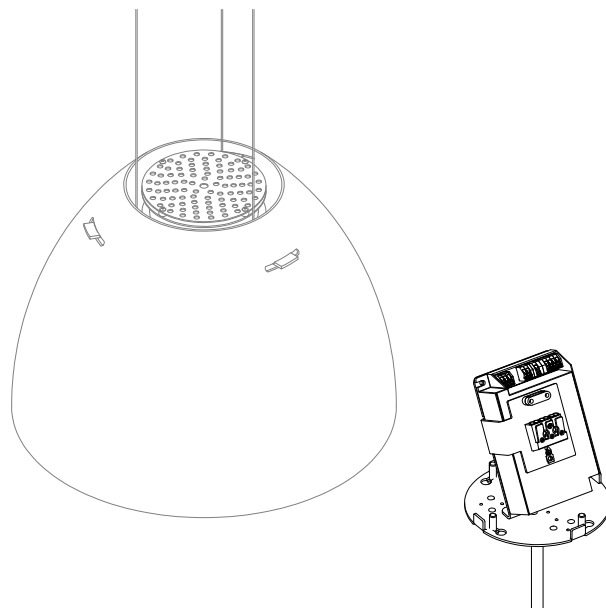

BALLO L804-500 LED RETROFIT KIT

BALLO L804-500 LED retrofit kit

Lyskilde:

LED type:	Bridgelux VERO SE series gen7
Operationel levetid:	min. 100.000 timer v/Ta max 25° C. L80B10
Systemforbrug:	23W (12-33W)
Farvetemperatur:	3000K, 4000K
Farvegengivelse:	CRI >80 (mulighed for >90)
Farvenøjagtighed:	3 steps SDCM
Luminous efficacy:	140 Lm/W

Driverdata:

Driver type:	Philips Xitanium
Operationel levetid:	min. 100.000 timer
Transientbeskyttelse:	>10 kV
Dæmpning:	Dynadimmer, 1-10V. Option for DALI

CE	Isolationsklasse I Vægt: 0,6 kg
----	------------------------------------